

## 国军标产品

于 、 、 、 、 、


### RMK

RMK Resistor, chip, thin film, fixed, established reliability

#### Applicable Specifications


Q/RU 21432.27-201	RMK1005
Q/RU 21432.28-201	RMK1608
Q/RU 21432.29-201	RMK2012
Q/RU 21432.30-201	RMK3216
Q/RU 21432.31-201	RMK3225
Q/RU 21432.32-201	RMK5025
Q/RU 21432.33-201	RMK6332

#### Dimensions

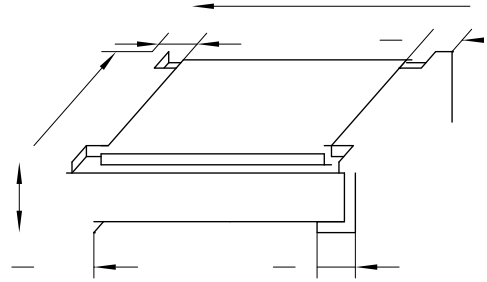

#### Dimensions In Millimeters

		~			
		~			
		~			
		~			
		~			
		~			
		~			

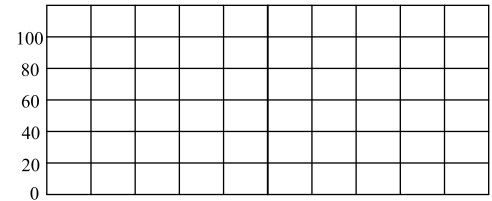

#### Technical And Standard Electrical Specifications

型号 T	标称阻值范围 Nominal resistance range (Ω)	阻值允许偏差 Resistance tolerance(%)	元件极限电压 Limiting element voltage ( V )	电阻温度系数 TCR ( ×10 <sup>-6</sup> /K)
RMK	50~50k	W: ±0.05	30	Y: ±10
	25~50k	B: ±0.1、D: ±0.5、F: ±1		E: ±25、H: ±50
RMK	50~260k	W: ±0.05	50	Y: ±10
	10~260k	B: ±0.1、D: ±0.5、F: ±1		E: ±25、H: ±50
RMK	50~300k	W: ±0.05	50	Y: ±10
	10~510k	B: ±0.1、D: ±0.5、F: ±1		E: ±25、H: ±50
RMK	50~499k	W: ±0.05	100、150	Y: ±10
	10~1M	B: ±0.1、D: ±0.5、F: ±1		E: ±25、H: ±50
RMK	50~499k	W: ±0.05	150、200	Y: ±10
	10~3M	B: ±0.1、D: ±0.5、F: ±1		E: ±25、H: ±50

#### Performance